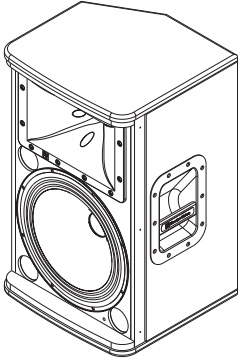
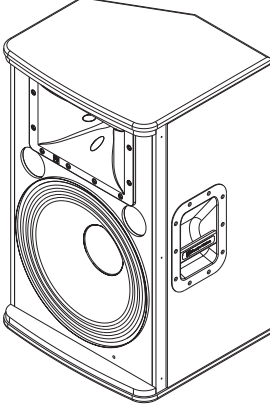
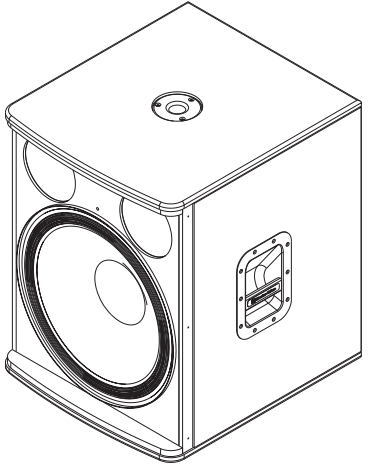


# Specifications

Model (Part Number)	<b>ELX 112P</b> (120V - F01U170820) (230V - F01U170817)	<b>ELX 115P</b> (120V - F01U170821) (230V - F01U170818)	<b>ELX 118P</b> (120V - F01U170822) (230V - F01U170819)
			
Freq. Response (-3 dB):	60 Hz - 18 kHz <sup>1</sup>	56 Hz - 18 kHz <sup>1</sup>	42 Hz - 100 Hz <sup>2</sup>
Freq. Range (-10 dB):	50 Hz - 20 kHz <sup>1</sup>	44 Hz - 20 kHz <sup>1</sup>	32 Hz - 130 Hz <sup>2</sup>
Max. Measured SPL <sup>3</sup> :	132 dB	134 dB	134 dB
Coverage (Horiz. x Vert.):	90° x 50°		Omnidirectional
Power Handling:	1000W		700W
LF Transducer:	(1) EVS-12K, 305mm (12") Woofer	(1) EVS-15K, 381mm (15") Woofer	(1) EVS-18K, 457mm (18") Woofer
HF Transducer:	DH-1K, 39mm (1.5") Titanium Diaphragm Compression Driver		N/A
Crossover Frequency:	1.7 kHz		100 Hz
Connectors:	(2) XLR/TRS Combo Jacks, (1) Stereo RCA, (1) XLR Link Output		(1) XLR/TRS Combo Jack, (1) XLR Link Output
Enclosure Material:	9-ply, 15mm Plywood, Internally Braced, with Textured Paint		
Grille:	18GA Steel with Black Powdercoat		
Dimensions (H x W x D):	607mm x 362mm x 340mm (23.89" x 14.25" x 13.41")	708mm x 432mm x 382mm (27.89" x 17.02" x 15.05")	661mm x 507mm x 574mm (26.02" x 19.98" x 22.60")
Net Weight:	18.8 kg (41.6 lbs)	24.3 kg (53.7 lbs)	31.7 kg (69.7 lbs)
Shipping Weight:	23.2 kg (51.3 lbs)	29.5 kg (65.1 lbs)	39.3 kg (86.6 lbs)
Accessories:	TSS-1, Aluminum Tripod Stand TSP-1, Tripod Kit, Includes (2) Tripod Stands and Carrying Case ASP-1, Steel Subwoofer Stand		ASP-1, Steel Subwoofer Stand

<sup>1</sup> Full Space Measurement, Boost Mode, Full-Range Mode.

<sup>2</sup> Half Space Measurement, Boost Mode

<sup>3</sup> Max SPL is measured at 1m using broadband pink noise at maximum amplifier output.

This document was created with Win2PDF available at <http://www.win2pdf.com>.  
The unregistered version of Win2PDF is for evaluation or non-commercial use only.  
This page will not be added after purchasing Win2PDF.