

Fixture Type:


These open-face luminaires are compact, lightweight, multi-purpose flood/fill lights ideal for stage, studio and location lighting applications. Designed to operate high-color-temperature tungsten-halogen lamps, these units are well suited for use in tight or confined spaces where maximum light output and beam spread are required for fill or flood lighting.

Specifications subject to change without notice.



**650/1000-WATT
OPEN-FACE Q-LITE AND Q-LITE JR.¹**

Features


- Ventilated steel housing
- Broad even beam
- Compact and lightweight
- Wide range of lamps
- Color frame, snoot / color frame holder, and safety cable with spring clip included
- U.L.- and c.U.L.-listed for 650 watts for the Q-Lite-Jr.¹ and 1000 watts for the Q-Lite
- Made in the U.S.A.

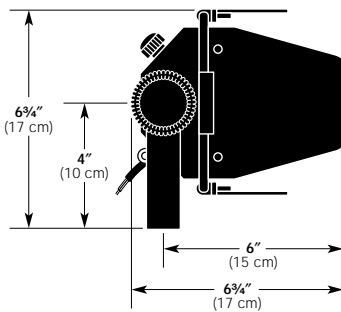

Q-LITE

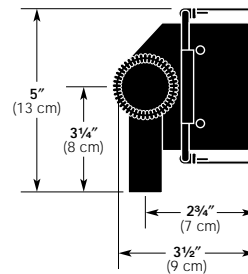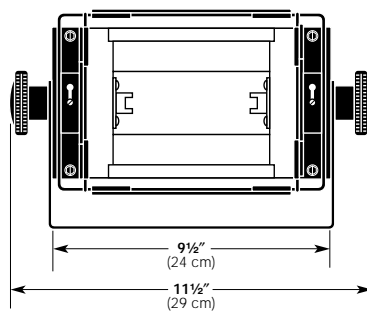

Q-LITE-JR¹

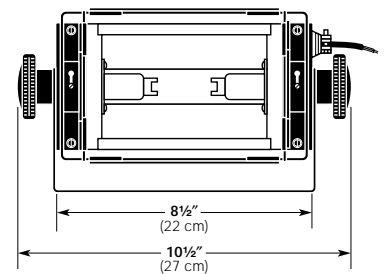

1. Discontinued as of 8/25/03. Available while supplies last.

650/1000-WATT OPEN-FACE Q-LITE AND Q-LITE JR.¹

Specifications

Housing: Sheet steel construction.

Materials: Corrosion-resistant materials and hardware.

Yoke: Rigid flat steel with dual-locking-dog tilt handles.

Reflector: Peened specular aluminum.

Socket: Recessed single-contact, two provided. Tool-free relamping.

Rating: For Q-LITE, 120/240 volts AC/DC operation, 8.3/4.2 amps, 1000 watts maximum; for Q-LITE-JR,¹ 120/240 volts AC/DC operation, 5.4/2.7 amps, 650 watts maximum.

Cable: 36" Teflon® leads encased in black fiberglass sleeving. Hi-Temp rubber cable optional up to 25'.

Accessories: Color frame, snoot / color frame holder, and safety cable with spring clip.

Finish: Black epoxy Sandtex, electrostatic application.

Weight: Approx. 7 lbs. (3.15 Kg) for Q-LITE; approx. 6 lbs. (2.7 Kg) for Q-LITE-JR.¹


Catalog
Numbers

Q-LITE


Q-LITE-JR¹ (see footnote)

Q-LITE PHOTOMETRIC DATA WITH FCM LAMP

VERTICAL

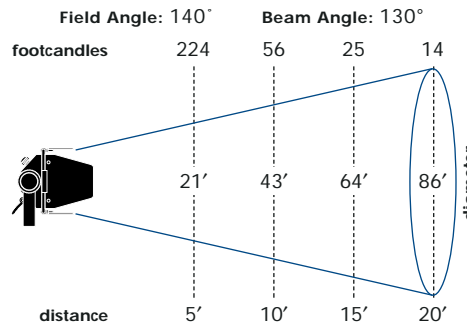

HORIZONTAL

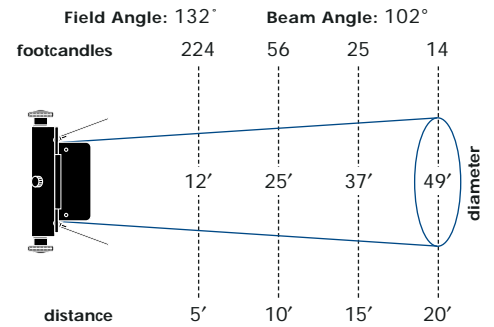

Q-LITE LAMP INFORMATION


watts	volts	ANSI code	color temp. (°K)	rated life (hrs)	rated lumens	correction factor	finish
1000	120	FCM	3200	300	27,500	1.00	Clear
1000	120	FHM	3200	300	26,000	--	Frost
750	120	EJG	3200	400	20,000	0.73	Clear
750	120	EMD	3200	400	19,500	--	Frost
500	120	FDG	3200	400	13,250	0.48	Clear
500	120	FDN	3200	400	12,800	--	Frost
500	120	FCL	3000	2,000	10,950	0.40	Clear
500	120	FCZ	3000	2,000	10,700	--	Frost
300	120	EHM	2950	2,000	5,950	0.22	Clear
300	120	EHZ	2950	2,000	5,900	--	Frost

ACCESSORIES SUPPLIED WITH LUMINAIRE	
QL-CF	Color Frame
SC-36-BK	Safety Cable with Spring Clip
QL-SN	Black Snoot / Color Frame Holder


ADDITIONAL ACCESSORIES	
510	Malleable Iron Pipe Clamp
F-SAS	Combination 5/8"x1 1/8" Spigot
QL-BD4	Black 4-Leaf Barn Door for Q-LITE
54-5006	25' Extension Cord with In-Line Switch and Edison Connector
QL-JR-BD4	Black 4-Leaf Barn Door for Q-LITE-JR ¹ (while supplies last)

Q-LITE-JR¹ PHOTOMETRIC DATA WITH FAD LAMP

VERTICAL

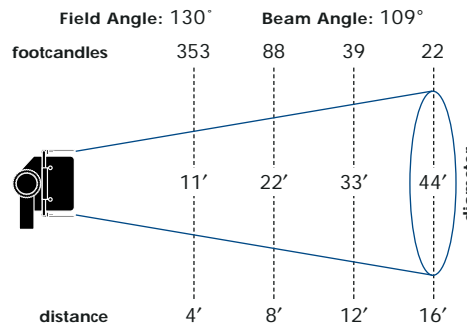

HORIZONTAL

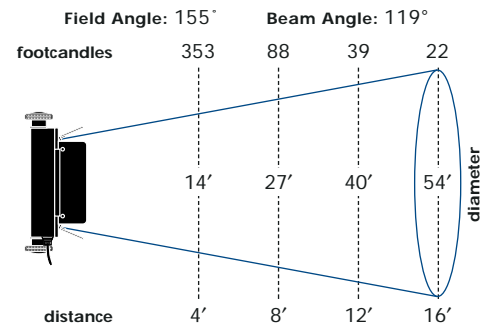

Q-LITE-JR¹ LAMP INFORMATION

watts	volts	ANSI code	color temp. (°K)	rated life (hrs)	rated lumens	correction factor	finish
650	120	FAD	3200	100	16,500	1.00	Clear
650	120	FBX	3200	100	16,000	--	Frost
650	120	DWY	3400	25	20,000	1.20	Clear
650	120	FCA	3400	25	19,000	--	Frost
240	120	FFM	3200	75	11,000	0.67	Clear
200	120	FDA	3200	250	10,400	0.63	Frost
200	120	EHR S	3000	2,000	7,800	0.47	Clear
200	120	EHR GE	2900	2,000	7,750	0.47	Frost
300	120	EHP S	3000	2,500	5,600	0.34	Clear
300	120	EHP GE	2900	2,500	5,650	0.34	Frost
300	120	EHX	3000	2,500	4,900	--	Clear

¹ Discontinued as of 8/25/03. Available while supplies last.