
Memory Lighting Consoles

MC 7000 Series

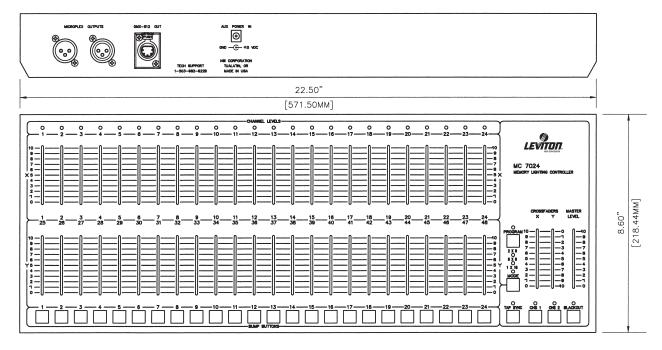


The MC 7000 Series lighting consoles are simple and flexible with three operating modes. These consoles provide standard 2-scene preset operation, single scene wide mode for double channel capacity and memory scene operation mode.

The MC 7000 Series is particularly well-suited to small theaters and stage performances. These products are so easy to program and operate, the instructions are silk-screened on the back of the units.

Applications

- Small Theater
- Houses of Worship
- Club/Bar
- Rentals
- Music Band



Dimensional Data - in. [cm] lbs.[kg]

	7008	7016	7024
Width	10.5 [26.7]	16.5 [41.9]	22.5 [57.2]
Depth	8.6 [21.8]	8.6 [21.8]	8.6 [21.8]
Height	2.5 [6.4]	2.5 [6.4]	2.5 [6.4]
Shipping Weight	7 [3.2]	9 [4.1]	12 [5.5]



Leviton Mfg. Co., Inc. P. O. Box 2210, Tualatin, OR 97062 Phone: (503) 404-5500 • Fax: (503) 404-5594 Copyright © 1995, 2001, 2002, Leviton Mfg. Co., Inc.

ton Mfg. Co., Inc. Building

Memory Lighting Consoles

Features

- Two user programmable 32 step chase patterns
- Tap sync button allows chase rate to be adjusted "on the fly"
- Dual split dipless cross faders allow even fades from scene to scene
- Channel bump buttons can be used to raise an individual control channel level to full or in wide mode can act as a flash memory scene
- Master level slider used to proportionally vary the intensity of the console's current output levels
- Blackout button
- Optional DMX512 protocol kit

MC 7008

- 8 x 8 individual control channels in two scene mode
- 16 individual control channels and 8 flash memory scenes in wide mode
- 8 individual control channels and 8 user programmable memory scenes in memory mode

MC 7016

- 16 x 16 individual control channels in two scene
- 32 individual control channels and 16 flash memory scenes in wide mode
- 16 individual control channels and 16 user programmable memory scenes in memory mode

MC 7024

- 24 x 24 individual control channels in two scene
- 48 individual control channels and 24 flash memory scenes in wide mode
- 24 individual control channels and 24 user programmable memory scenes in memory mode

Description	Cat. No.	
MC 7008	FGP-0-07008-0	
MC 7016	FGP-0-07016-0	
MC 7024	FGP-0-07024-0	
Options		
DMX512 Kit, 120V	OPT-07512-01	
DMX512 Kit, 240V	OPT-07512-09	
Rack Mount Kit		
for MC 7016 only	OPT-00540-0	

Specifications subject to change without notice

